

Since 1976

KOCOM

www.kocom.com

VIDEO PHONE

KCV-464

Ultra Slim Design




KCV-464/D464/D464V




KC-Q81P

**MADE IN
KOREA**

**Expandable up to 2 Door Cameras
& 2 CCTV Cameras**

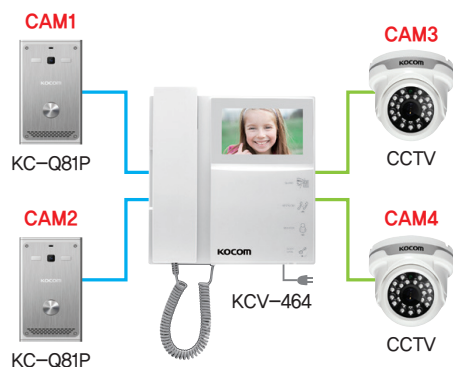


**Internal Communication
max 4 indoor units**

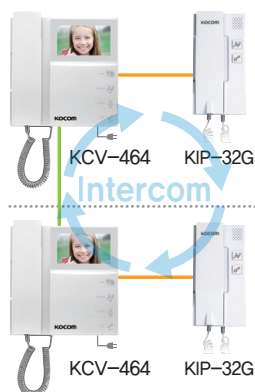


- 4.3" Color Digital LCD Screen
- Call & Communication with a Visitor
- Multifamily, Apartment Application (*SYSTEM Mode)
- Video Monitoring of Door Camera and CCTV
- Operating Condition Display with Icons in Selectable Language : English, Russian and Spanish
- Touch Buttons for Control
- Door Open

System Diagram

Single House

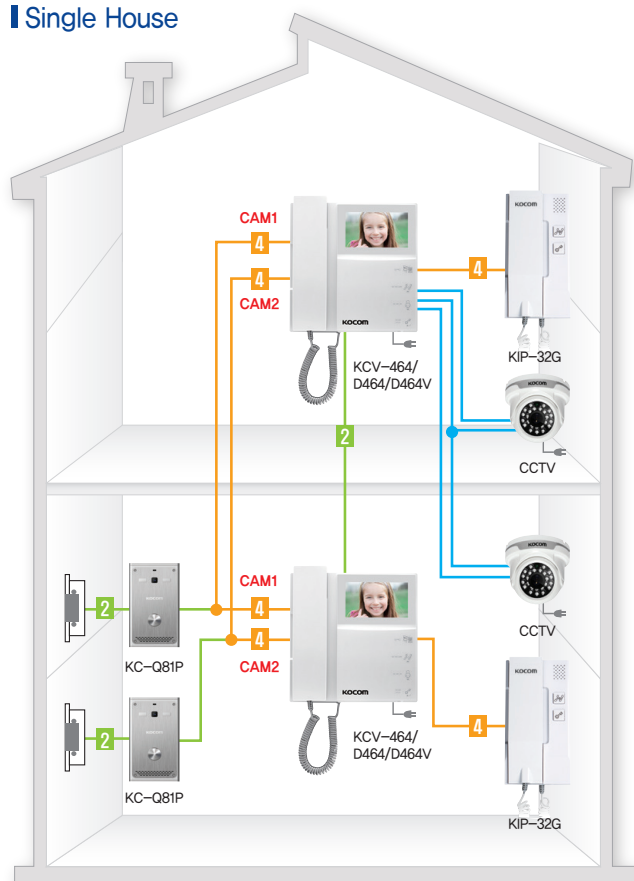

Multifamily / Apartment

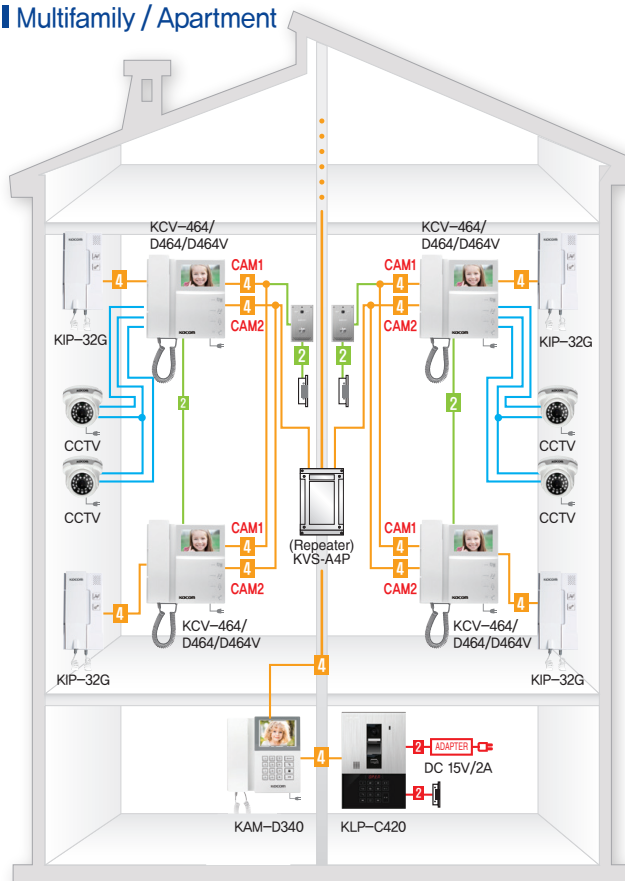

Compatible Door Cameras and Lobbyphone



KC-Q81P



KC-MC24



KC-MC20



KC-C60



KC-MC30



KLP-C420

Lobbyphone

Specifications

Monitor

Model No.	KCV-464	KCV-D464	KCV-D464V
Power Source	100-240V~, 50/60Hz	DC 13.6V-2A Adaptor(CE)	DC 13±2V DC 15V-2A Adaptor(UL)
Power Consumption	1W(±20%) (Stand by), 8W(±20%) (In load)	1.2W(±20%) (Stand by), 8W(±20%) (In load)	
Operating Temperature	0℃ ~ +40℃		
Communication Type	Handset Type		
Wiring	Door camera : Polarized 4 wire Interphone : Polarized 4 wire Ex_Monitor data : Polarized 2 wire CCTV : Polarized 2 wire		
Mount Type	Surface mount		
Dimension	193(W) x 195(H) x 29(D) mm		

Camera

Model No.	KC-Q81P
Power Source	DC 12±1V (Power from Monitor)
Power Consumption	Max. 3W
Operating Temperature	-10℃ ~ +50℃
Viewing angle	Diagonal 90° (angle adjustable)
Dimension	75(W) x 136.5(H) x 18.5(D) mm

KOCOM

KOCOM CO., LTD.

Head Office KOCOM BLDG., 22, Arayuk-ro, Gochon-eup, Gimpo-si, Gyeonggi-do, 10136, Korea

TEL : +82-2-6675-2211 | FAX : +82-2-6675-2000 | E-mail : export@kocom.com | www.kocom.com

※ This catalog is based on the date as shown in the right and specifications are subject to change without notice for quality improvement.

Q1114